


SPECIFICATION FOR PMSM


TZ200XB08-P75-DL

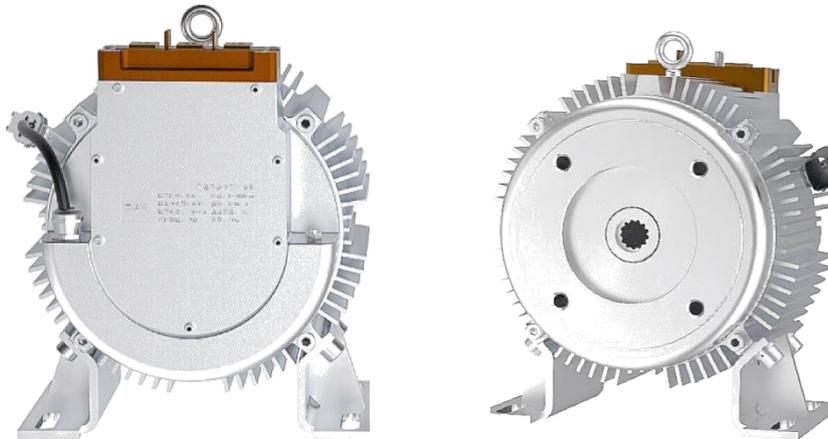

1. Product Model & Specification

TZ200XB08-P75-DL			
Rated Voltage	80 V	Cooling Method	Air
Rated Power	10 kW	Peak Power	39 kW
Rated Speed	2500 rpm	Peak Speed	5500 rpm
Rated Torque	38 Nm	Peak Torque	160 Nm
Product Weight	28 kg	Size	250*233 mm
Application	Aerial Working Platform, etc.		

2. Outline Dimension

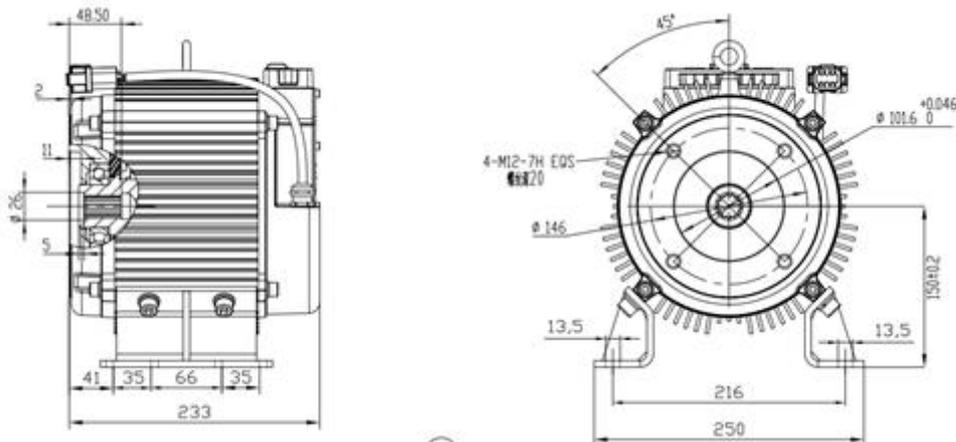

3. Interface Function

3.1. Motor Installation and Matching Cable:


3.1.1. Power Cable Selection:

Wiring of magnetic encoder+Temperature sensor-8-core cable-black

3.1.2. Wiring Definition

No.	Color	Definition
U		U-Phase of Three-phase Motor
V		V-Phase of Three-phase Motor
W		W Phase of Three-phase Motor
Encoder and Temperature Sensor Leads	Black	Wiring of Magnetic Encoder and Temperature Sensor

3.1.3. Terminal Model and Pin Definition

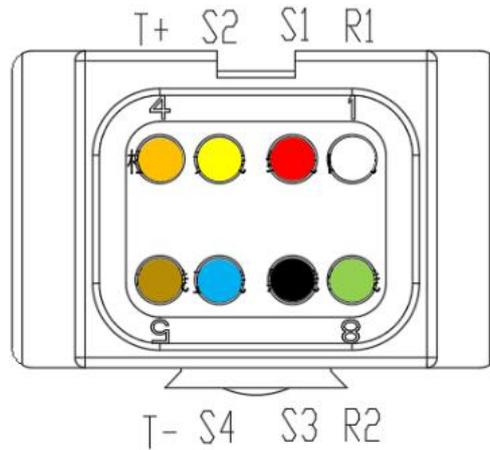

Connector model: Tyco AMP-174984-2, plug model: Tyco AMP-2822393-1,
temperature sensor model: KTY84-130

Terminal No.	Function
White	R1 Excitation+
Green	R2 Excitation-
Red	S1 Cos+
Black	S3 Cos-
Yellow	S2 Sin+
Blue	S4 Sin-
Orange	Temperature+
Brown	Temperature-

4. Other

4.1. Design Standard

A. The theoretical weight of the motor is 28 kg; Cogging torque is 0.23 N·m (test before installing oil seal); the radial circle runout is ≤ 0.035 mm, the axial clearance is 0.3 mm, and the noise of the motor during no-load operation is less than 65 dB.

B. Duty: S3-15%/S2, the external temperature of the motor is -40°C-60°C when working.

C. Other performance requirements shall comply with relevant requirements of QC/T 792-2007.

4.2 Safety Standard

The limit requirements of prohibited substances and toxic and harmful substances meet the latest edition of GB/T 30512.